/ CRISTALLO RETINATO ALIMENTARE

Structure
3 layers, braided reinforcement.

Applications
Passage of liquid cooling solutions, chemicals, compressed air and other uses in the food and mechanical industry.

Material
Suitable for passage of food liquids in compliance with EU 10/2011 for simulants A, B C.

Note
Particularly suitable for applications that require resistance to high pressures.

Struttura
3 strati, rinforzo retinato.

Applicazioni
Passaggio di liquidi di raffreddamento, soluzioni chimiche, aria compressa ed altre applicazioni nell'industria alimentare e meccanica.

Materiali
Conforme alle direttive EU 10/2011 per il passaggio di liquidi alimentari per simulanti A, B, C.

Note
Particolarmente indicato per impieghi che richiedano resistenza ad elevate pressioni.

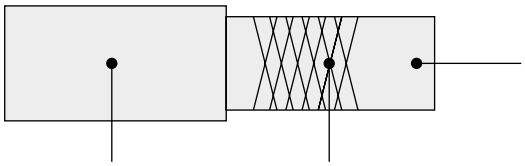

Items available on stock
Articolo disponibile a magazzino

Code *Codice*	Ø internal (mm) *Ø interno (mm)*	Ø external (mm) *Ø esterno (mm)*	Weight (gr) *Peso (gr)*	Lenght (m) *Lunghezza (m)*	W.P. Bar	B.P. Bar	Pall	EAN Code *Codice EAN*	m/plt	€/m
	5	11	92	100	18	54	42			
463210	6	12	104	100	18	54	42	802148 463220 6	4200	
463310	8	14	127	100	18	54	30	802148 463310 4	3000	
	9	15	138	100	18	54	30	Variable / *Variabile*		
463450	10	16	150	50	18	54	42	802148 463450 7	2100	
	11	17	160	100	12	36	30	Variable / *Variabile*		
463550	12	17	140	50	12	36	36	802148 463550 4	1500	
	12	18	173	50	12	36	36	Variable / *Variabile*		
463600	13	19	184	50	12	36	36	802148 463600 6		
463650	15	21	207	50	12	36	30	802148 463650 1	1500	
463700	16	22	219	50	10	30	24	802148 463700 3		
463750	19	26	302	50	10	30	30	802148 463750 8	1000	
463760	22	30	399	50	8	24	20	802148 463760 7		
463850	25	33	445	50	8	24	16	802148 463850 5	800	
463855	30	39	620	50	8	24	12	802148 463855 0		
	32	42	710	30	8	24	16	Variable / *Variabile*		
	35	45	780	30	6	18	16	Variable / *Variabile*		
463870	38	48	820	30	6	18	12	802148 463870 3		